

# **HINGES**

**Slip Joint Hinges • Butt Hinges**


## Slip Joint Hinges

PART NUMBER	THICKNESS	LENGTH	WIDTH	PIN DIAMETER
737	.050	1.50	1.44	.120
371	.060	1.50	1.50	.125
344	.062	2.00	1.50	.125
631	.062	2.00	2.00	.187
588	.072	2.00	1.68	.125
614	.075	2.50	1.88	.187
614W	.075	2.50	2.50	1.87
589	.080	2.00	1.68	.187
589W	.080	2.00	2.00	1.87
728	.080	2.00	1.50	.250
372	.090	2.50	2.50	.250
749	.090	3.00	2.00	.187
746	.093	2.50	2.50	.187
606	.093	3.00	3.00	.250
753	.093	4.00	3.00	.250

Slip Joint Hinges, also known as “take-apart” hinges, are well-suited for applications such as removable doors and panels. They are comprised of a male leaf with a fixed pin and female leaf with no pin, and available in a right hand or left hand configuration.

These parts are readily available in steel or stainless steel, though they can be reproduced from virtually any desired metal or alloy. Most common finishes include zinc on steel, passivate and electropolish on stainless, and anodize on aluminum.

Most hinges are stocked without holes or with two holes per leaf, and custom hole patterns can also be requested.

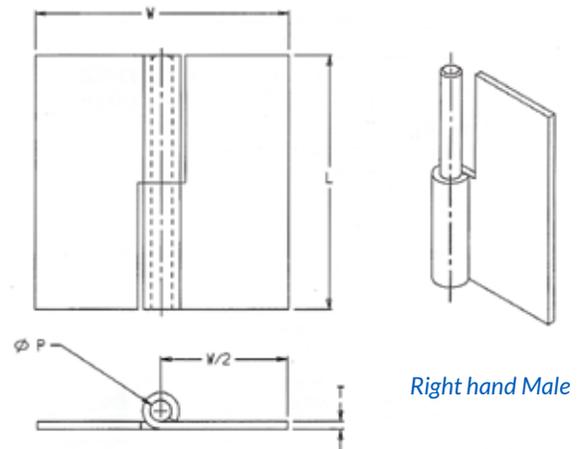

## Butt Hinges

PART NUMBER	THICKNESS	LENGTH	WIDTH	PIN DIAMETER
418	.050	1.5	1.5	.125
425	.060	2.0	2.0	.125
500	.062	2.5	2.5	.125
354	.070	3.0	1.5	.156
364	.072	3.0	2.0	.156
498	.080	2.0	2.0	.187
674	.080	2.5	2.5	.187
673	.080	2.5	2.5	.250
693	.078	3.0	3.0	.187
688	.093	3.0	3.0	.250
731	.125	2.5	2.5	.250
691	.125	3.0	3.0	.250

Butt hinges are available in a broad range of sizes, types and configurations to meet virtually any applications needs.

Our hinges feature a 5-knuckle configuration with a non-removable spun pin for added strength and security, and minimal side and end play.

Most hinges are stocked without holes or with two holes per leaf, and are readily available in steel or stainless steel. Common finishes include black oxide or zinc with clear or yellow chromate on steel; passivate or electropolish for stainless steel, and anodize on aluminum.

Custom piercing, trimming and removable pins can be requested to suit your needs.

